## —QuickBuild






## **Differential Pressure Transmitters**





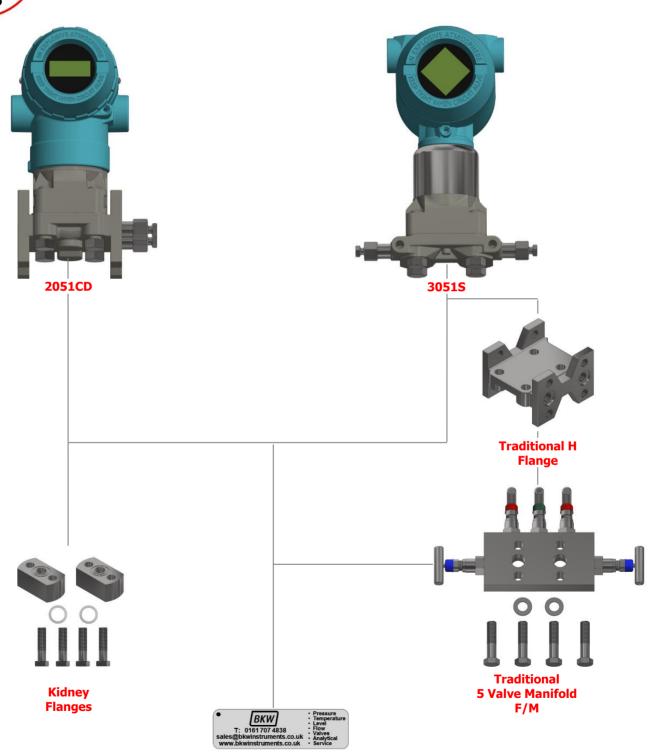











## —QuickBuild



	DIFFERENTIAL PRESSURE TRANSMITTERS					
Model: 2051CD		3051S				
Description:	Aluminium Housing LCD Indicator ATEX Flameproof Intrinsically Safe Type n, Dust	LCD Indicator  ATEX Flameproof Intrinsically Safe  LCD Indicator  ATEX Flameproof Intrinsically Safe				
Output:	4 20 mA HART	4 20 mA HART				
Input:	t: 2 wire 2 wire					
IP Rating:	IP66/68	IP66/68				
<b>Process Connection:</b>	1/4" NPT Traditional H Flange	1/4" NPT Coplanar				
<b>Ranges:</b> Differential  0 - 25 "H <sub>2</sub> O  0 - 250 "H <sub>2</sub> O  0 - 1,000 "H <sub>2</sub> O  0 - 300 psi		Differential $0 - 25 \text{ "H}_2\text{O}$ $0 - 250 \text{ "H}_2\text{O}$ $0 - 250 \text{ "H}_2\text{O}$ $0 - 1,000 \text{ "H}_2\text{O}$ $0 - 300 \text{ psi}$				

Model:	Traditional H Flange Kit	
<b>Process Connection:</b>	1/4" NPT Female	
Material:	316 Stainless Steel	

Model:	Traditional 5 Valve Direct Manifold Kit	
<b>Process Connection:</b>	1/2" NPT Female	
Material:	Material: 316 Stainless Steel	

Model:	Kidney Flange	
<b>Process Connection:</b>	1/2" NPT Female	
Material:	316 Stainless Steel	

## 316 Stainless Steel Tags

Advise your unique identification number.

Documentation					
Туре:	QS CALCERT	COC	QB 3.1CERT	TC	
Description:	Calibration Certificate	Certificate of Conformity	3.1 Material Certificate	Test Certificate	





